



# Charger Plug Replacement Kit

Model: T1 Battery, Speed Scrub 15" Battery



## INSTALLATION INSTRUCTIONS:

**SPECIAL TOOL REQUIRED:** Auxiliary terminal insertion/removal tool - Anderson 111038g2,  
Contact crimp tool - Anderson 1309g2

### Kit Contents

Item	Description	Qty.
1)	Replacement Charger Plug w/ wire leads	1
2)	6 gauge Power Contact Terminal	2
3)	14 gauge reducer bushing	2


This kit is designed to replace a damaged plug on the battery charger or the plug installed on the machine.

**FOR SAFETY: Before replacing plug on charger, disconnect charger's power cord. Before replacing plug on machine, remove battery from machine.**


Remove the power contact terminals from damaged plug as described at bottom of page.

- **If replacing the plug installed on the machine**, cut the red wires from the damaged plug and reconnect them to the two red wire leads on new plug as instructed below. Remove the yellow jumper wire from new plug. Pull on wire to remove.

- **If replacing the plug on the battery charger**, remove the two red wire leads from the new plug. Pull on wires to remove. Do not remove the yellow jumper wire from new plug.

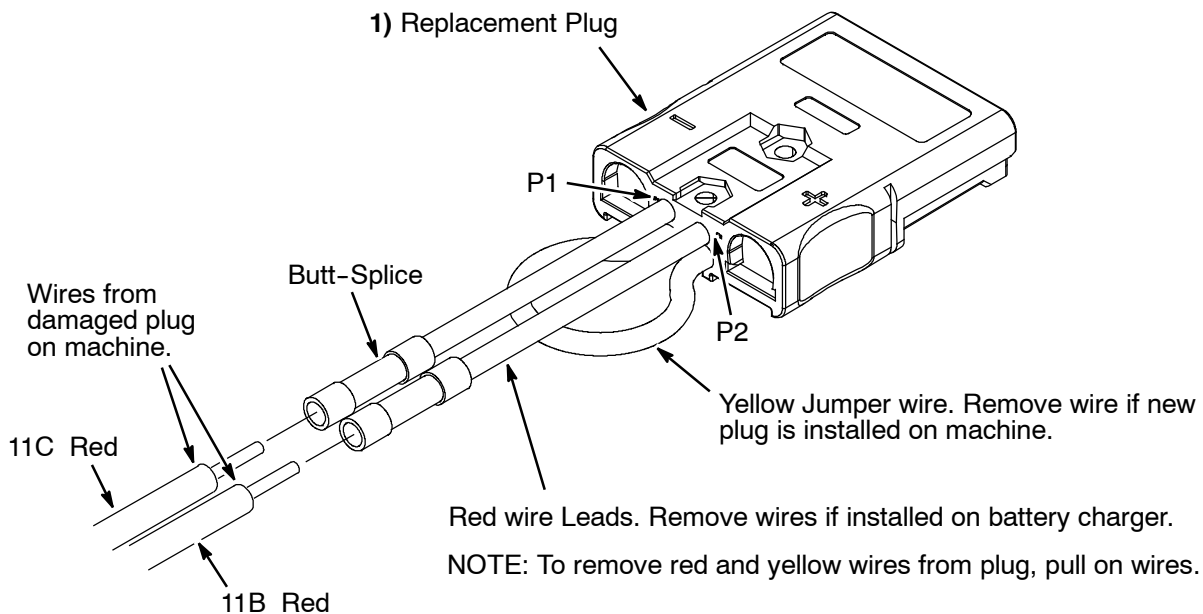


Replace the power contact terminals if damaged (Special tool required).

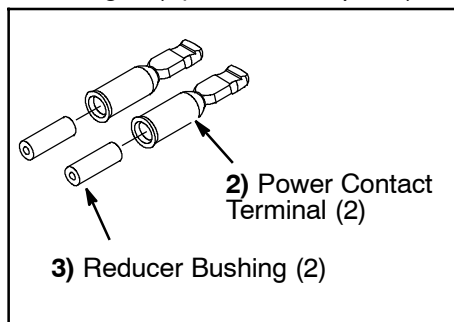

To remove power contact terminals, follow instructions below:

Using a small screwdriver, press the retention spring downward and pull out the contact terminal. **DO NOT** position the tool under the contact terminal and pry upward, terminal damage will result.

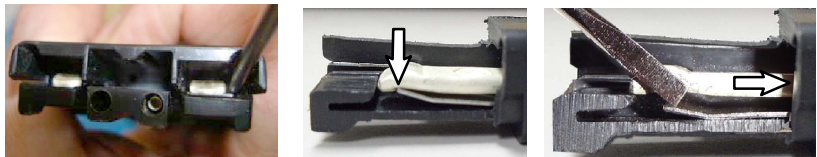

(Cut-away View)