



INSTRUCTION BULLETIN

No. 9020694
Machine: M20/T20
Published: 02-2022
Rev. 00

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in the machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for **kit number 9020695**


Kit installation must be performed by TennantTrue[®] service or an authorized service provider.

SYNOPSIS:

This kit contains the parts needed to replace a flasher on M20 sweeper scrubbers and T20 scrubbers. Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: NONE

(Estimated time to complete: 15 minutes)



PROTECT THE ENVIRONMENT

Please dispose of packaging materials, used machine components such as batteries and fluids in an environmentally safe way according to local waste disposal regulations.

Always remember to recycle.

PREPARATION:

FOR SAFETY: Before leaving or servicing machine, stop on level surface, turn off machine, set parking brake, and remove key.

1. Open the front shroud to access the battery and the turn signal components located inside the battery compartment. (Fig. 1)
2. Disconnect the battery cables from the battery.



WARNING: Always disconnect battery cables from machine before working on electrical components.

INSTALLATION:

1. Remove the existing flasher from the finger grip clip/front turn signal harness. Discard the removed flasher. (Fig. 1)
2. Connect the new flasher (1) to the front turn signal harness and insert the flasher into the finger grip clip. (Fig. 1)
3. Reconnect the battery cables to the battery.
4. Turn on the machine.
5. Test the turn signals. Adjust the turn signal switch to left and right turn positions. Ensure both the right and left turn signal lights function when the turn signal switch is adjusted to the respective left or right turn positions. (Fig. 1)
6. Turn off the machine.
7. Close the front shroud.

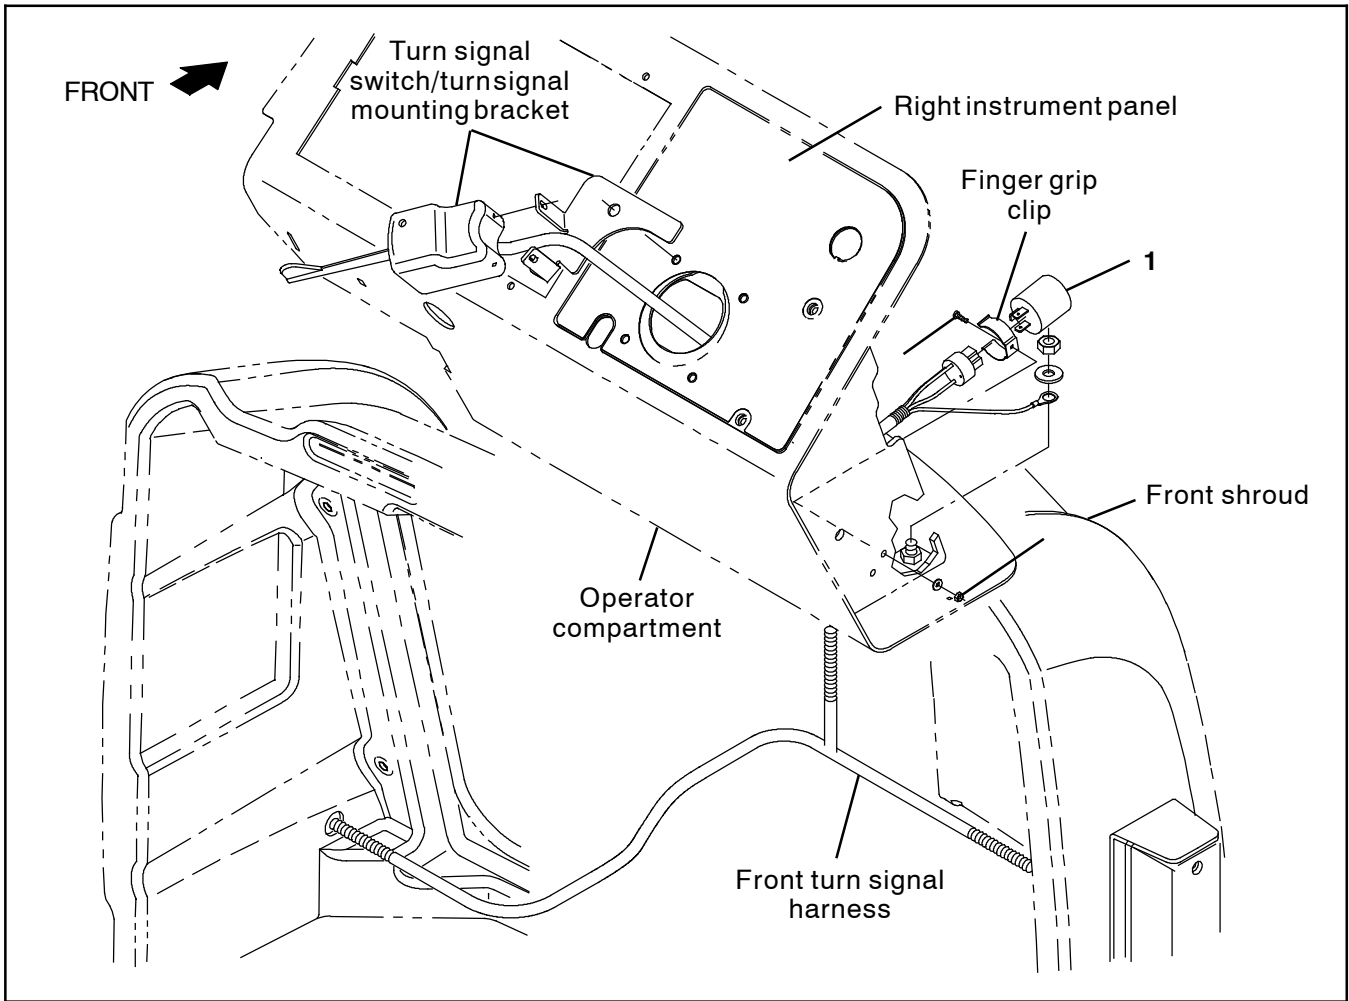


FIG. 1

Bill Of Materials For Flasher Kit, Replmt, CI [M/T20] - 9020695

Ref.	Tennant Part No.	Description	Qty.
1	31922	Flasher, HD, 12VDC 25A [#10- 57300]	1

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452