



Battery Burnishers

B5 B7 B10

TENNANT'S FAMILY OF BATTERY BURNISHERS

MAXIMIZE EFFICIENCY AND RESULTS

B5 B7 B10



PERFORMANCE AND PRODUCTIVITY

Ease of Use

Innovative design allows operators to maintain a safe ergonomic position when changing pads.

Low dBA

For noise sensitive environments decibels as low as 63 dBA on our walk-behind models to 69 dBA on our riders.

Active HEPA Dust Control

Industry's only walk-behind and riding burnishers with standard active HEPA dust control filtration.

CLEANING SOLUTIONS TAILORED TO YOUR NEEDS

RETAIL

Delivers high performance, high gloss results enabling your stores to reflect high cleaning standards to help drive repeat customer traffic and higher customer satisfaction.

BSC


Burnishers deliver consistent predictable results by providing managers the option to set operator controls which simplifies the burnishing operation and employee training.

EDUCATION

Students and staff require distraction-free environments for proper learning and the battery powered burnishers deliver with their emissions free, quiet operation while maintaining high gloss performance.

HEALTHCARE

Low noise levels and active HEPA dust control air filtration helps keep patients, doctors, and families in a safe and comfortable environment and can assist in higher HCAHPS scores.

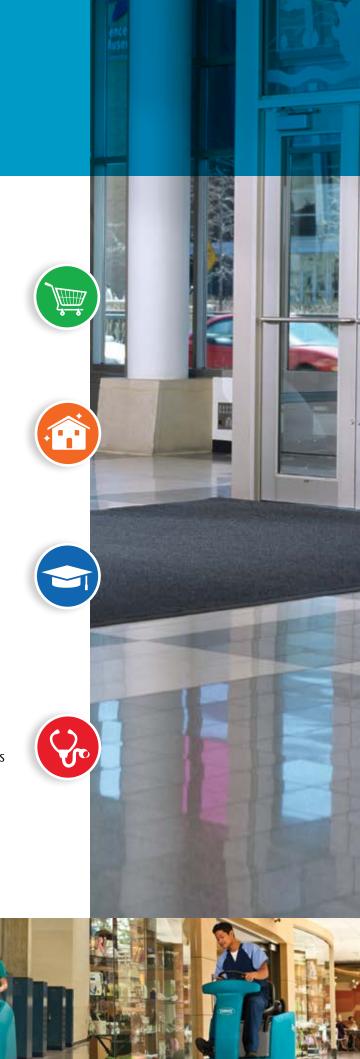







B10BATTERY RIDER BURNISHER

Simplify Machine Operation and Maintenance

Automated head-lift and easy battery access allows for simple serviceability.

Customize Your Shine

With 3 speeds and 3 down pressure settings, you can use one machine for many applications and environments.

Engineered for Power and Performance

Accommodates small and large areas quickly and easily with over 20% more horsepower than the leading competitor.

Improve Indoor Air Quality

Active 4-stage HEPA filtration dust control system improves indoor air quality.

Improve Operator Comfort and Productivity

Ergonomically designed to make burnishing comfortable and can cover large areas quickly.

B5/B7

BATTERY WALK-BEHIND BURNISHER

Low Sound Levels

Ultra quiet machines – as low as 63 dBA – maintaining low sounds levels for operators and noise sensitive environment.

Environmental Benefits

Active dust control with HEPA filtration standard – maintains indoor air quality.

Operator Safety

90 degree flip up head – enables a safe ergonomic position when changing pad.

Ease of Use

Choose between actuated or optional Set and Forget™ down pressure to allow supervisors to select ideal setting for all operators.

Productivity

Delivers high performance, propane-like gloss results.

Reduce Cost of Clean

Easy to identify yellow maintenance touch points and onboard reference materials help eliminate equipment breakdowns.











BATTERY BURNISHERS



SUSTAINABILITY

 Safer for the environment with no exhaust emissions and active HEPA dust filtration to protect indoor air quality.



HEALTH AND SAFETY

- Ultra quiet operation, as low as 63 dBA, on walkbehinds and 69 dBA on rider, maintain safe sound levels for operators.
- Ergonomic head designs maintain a safe position for operators when changing machine pads.
- Active filtration with HEPA standard helps to maintain a safe indoor air quality.
- No fumes or propane tank storage costs or concerns.



IMAGE

- Delivers propane-like gloss results.
- Maximize shine with optimized down pressure and pad speed.
- Optional Set and Forget™ on walk-behind models or Quality Assurance Controls™ on our rider allows supervisors to select optimal pad pressure for all applications.



REDUCE COSTTO CLEAN

Reduce costly maintenance issues and downtime with the easy to identify yellow maintenance touch points.

TENNANTTRUE® PARTS, SERVICE AND FINANCE SOLUTIONS

- Reduce rework, labor and safety costs by using only Tennant *True* parts and service.
- Ensure optimal cleaning performance by selecting a Tennant True Service program.
- Improve uptime by leveraging Tennant True parts and service.



BATTERY BURNISHER FAMILY

	B5	В7	B10
BURNISHING SYSTEM	20 IN / 510 MM 20 IN / 510 MM PAD ASSIST PROPEL	24 IN / 610 MM 27 IN / 690 MM PROPEL PROPEL	24 IN / 610 MM 27 IN / 690 MM PROPEL PROPEL
Path width Productivity rate (max) Productivity rate (2 in / 51 mm overlap)	20 in / 510 mm 16,260 ft²/hr / 20,000 ft²/hr / 1,510 m²/hr 2,500 m²/hr 13,500 ft²/hr / 18,000 ft²/hr / 1,260 m²/hr 1,670 m²/hr	24 in / 610 mm 24,000 ft²/hr / 2,200 m²/hr 22,000 ft²/hr / 2,000 ft²/hr / 2,000 m²/hr 2,000 m²/hr 2,000 m²/hr 2,300 m²/hr	24 in / 610 mm 27 in / 690 mm 30,250 ft²/hr / 34,375 ft²/hr / 2,813 m²/hr 3,197 m²/hr
PAD DRIVE SYSTEM Pad motor Pad speed Burnishing speed (variable) Min Max Foward (as shipped) Low Medium High Console programmable Low Range High Range Transport speed (max)	36 V, 75 A, 2.8 hp max / 2.1 kW 2100 rpm Pad assist	37 V, 90 A, 3.6 hp max / 2.6 kW 1875 rpm 100 fpm / 30 mpm 200 fpm / 60 mpm — — — — — — — — — — — — —	4 hp direct drive 1,500-1,600 rpm 150 fpm / 45.7 mpm 200 fpm / 61.0 mpm 150 fpm / 45.7 mpm 175 fpm / 53.3 mpm 200 fpm / 61.0 mpm 125, 150, 175 fpm / 38.1, 45.7, 53.3 mpm 250, 275, 300 fpm / 76.2, 83.8, 91.4 mpm 435 fpm / 8 Kpmh
POWER SYSTEM			
Voltage Battery Wet/lead acid (standard) AGM (optional) Wet/lead acid (optional) Battery run time On-board charger DUST CONTROL SYSTEM	36 VDC 3 - 12V, 185 Ah 3 - 12V, 225 Ah 3 - 12V, 234 Ah 3 - 12V, 225 Ah — 3 hour minimum run time at low down pressure setting Yes	36 VDC 6 - 6V, 240 Ah 6 - 6V, 330 Ah 6 - 6V, 312 Ah 6 - 6V, 360 Ah 3 hour minimum run time at low down pressure setting Yes	36 VDC 6 - 6V, 435 Ah 6 - 6V, 390 Ah — 3 hour minimum run time at low down pressure setting Yes
HEPA filtration Passive filtration (optional) MACHINE SPECIFICATIONS	99.97% @ 0.3 microns 95% @ 0.3 microns	99.97% @ 0.3 microns 95% @ 0.3 microns	99.97% @ 0.3 microns —
Length Width Height Weight (with batteries) Sound level (operator's ear) Active Passive WARRANTY	59 in / 1,499 mm 24.5 in / 622 mm 43 in / 1,092 mm 507 lbs / 230 kg 572 lbs / 259 kg 64 dBA 65 dBA	61.5 in / 1562 mm 63 in / 1600 mm 30 in / 762 mm 31.5 in / 800 mm 43 in / 1,092 mm 616 lb / 279 kg 797 lb / 362 kg 63 dBA 65 dBA	58.5 in / 1,486 mm 30.0 in / 762 mm 55 in / 1,397 mm 1,346 lbs. / 611 kg 58.5 in / 1,486 mm 31.5 in / 800 mm 55 in / 1,397 mm 1,350 lbs. / 612 kg

WARRANTY

See your local representative for warranty information.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information, send an email to info@tennantco.com

701 North Lilac Drive Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033 Quebec: +1.800.361.9050 Overseas: +1.763.540.1315

www.tennantco.com info@tennantco.com