






REINVENT HOW THE WORLD CLEANS

S30

Ride-on sweeper

Easily pick up everything from cement dust to heavy debris with the powerful S30 Ride-On Sweeper. Achieve maximum performance and consistent cleaning results in the toughest applications – indoors or outdoors! Helps manage your silica dust exposure control plan with our optional HEPA filtration system.

Available Technologies

-  Three stage SweepMax® Plus
-  Optional HEPA filtration system
-  IRIS® Asset Manager



Engineered for **productivity**



- 1. SweepMax® Plus Stage 1:** Perma-Filter™ helps keep bulky debris, moisture and dirt in the hopper removing 90% of particulates from the air stream.
- 2. SweepMax® Plus Stage 2:** Cyclonics longer filter life with exclusive cyclonics dust control that removes an additional 90% of dust particles from the air stream before reaching the filter.
- 3. SweepMax® Plus Stage 3:** Canister Nanofiber Filer is MERV 15-rated, flame retardant Donaldson Ultra-Web® filter loads and shakesback 70% more effectively, and cleaner air from filtering sub-micron dust particulates down to .5 microns at 99% efficiency.


- 4. Reduce downtime and operator fatigue** with easy no-tool brush removal and change, aided by the self-guiding 8-spline drive and idler hub.
- 5. Easy-to-set color-coded brush wear indicator** for quick brush pressure settings.
- 6. Increased sweeping results** with a main brush that is only 2 in (51 mm) wider than the hopper opening, as compared to some competitors with brushes wider than their hopper openings.

Optional accessories

Get the performance you need for your specific environment with these options.




1-Step™ start button with controls that enable sweeping systems to be activated with a single green button.



FOPS certified pressurized cabin, available with heat and air conditioning plus our dust suppression skirts.


Inside the **S30**

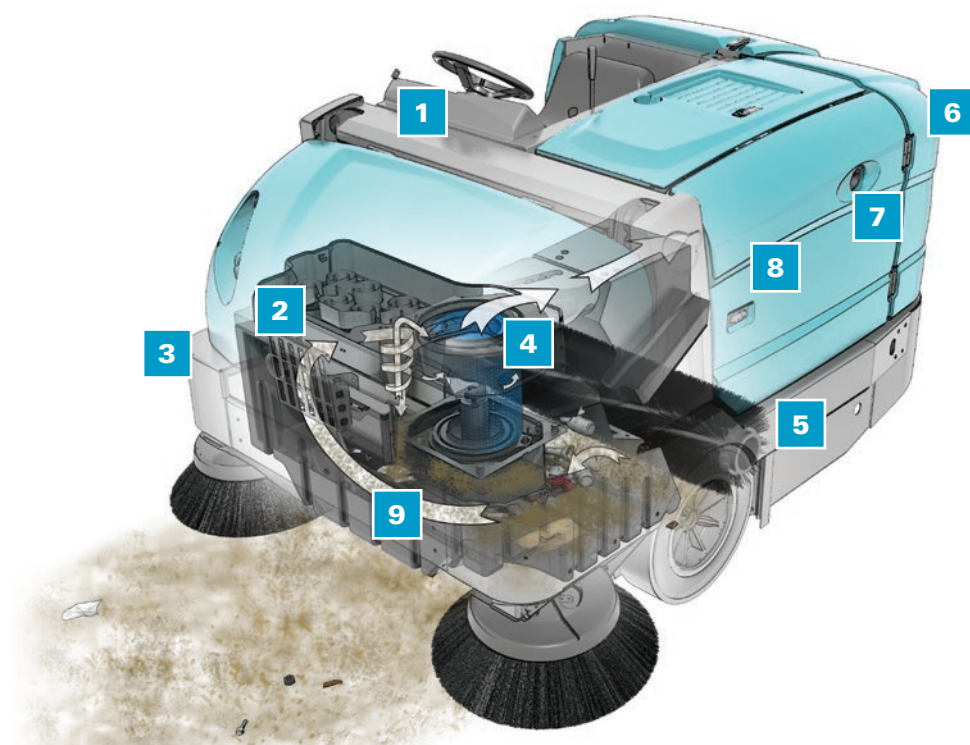

- 1. II-Speed™ sweep system** increases the speed of the main brush, side brush, and vacuum fan by 15%.
- 2. Standard Thermo-Sentry™** hopper temperature sensor.
- 3. Heavy-gauge steel machine frame** designed for long-term structural reliability and strength.
- 4. SweepMax® Plus** provides cyclonic filtration and dry dust control for sweeping all floor surfaces.
- 5. Retractable, spring-loaded flap** recirculates debris for improved sweeping results.

- 6. Rounded corner design** improves turn-off from walls or racking to minimize damage.
- 7. Large capacity hydraulic oil tank** and triple accessory pumps.
- 8. EasyOpen™ service access** with onboard diagnostics.
- 9. ShakeMax® 360** orbital shaker in-hopper delivers 70% more effective shakeback and quieter operation.

Optional accessories



ANSI tested overhead guard protects the operator from objects falling directly above.



Dual side brushes for increased productivity.

S30 specifications

SWEEEPING SYSTEM

Cleaning path: Single side brush Dual side brush	1,588 mm 2,032 mm
Main brush length (tubular)	1,145 mm
Side broom diameter	660 mm
Debris hopper	395 L
Debris hopper weight capacity: Plastic Steel	490 kg 545 kg
Debris hopper: Dump height (variable to) Dump reach	1,525 mm 760 mm

DUST CONTROL SYSTEM

Filter area	7.4 m ²
Dust filtration (seasoned filter)	0.5 microns at 99% efficiency
Vacuum fan speed: Normal sweeping mode Litter sweeping mode	4,600 rpm 5,500 rpm
Vacuum diameter	280 mm

PROPELLING SYSTEM

Propel speed forward (variable to)	13 km/h
Propel speed reverse (variable to)	5.0 km/h
Engine - LPG Gross Intermittent Power* Tennant Governed Power	38.5 kW @ 2800 rpm 31.6 kW @ 2300 rpm
Engine - gasoline: Gross Intermittent Power* Tennant Governed Power	37.8 kW @ 2800 rpm 30.3 kW @ 2300 rpm
Engine - diesel: Gross Intermittent Power* Tennant Governed Power	18.5 kW @ 2300 rpm 18.5 kW @ 2300 rpm
Gradeability - full hopper	10° / 18%
Gradeability - empty hopper	14° / 25%
Ground clearance	100 mm

MACHINE SPECIFICATIONS

Length	2,360 mm
Width	1,590 mm
Height with overhead guard Without overhead guard	2,095 mm 1,475 mm
Weight (net)	1,620 kg
Minimum aisle turn	2,870 mm

WARRANTY

See your local representative for warranty information

*Per SAE J1995

Specifications subject to change without notice. Specifications based on standard machine configurations, no options

Tennant – Reinvent how the world cleans

With a vision to become a global leader in sustainable cleaning innovation that empowers our customers to create a cleaner, safer and healthier world, Tennant creates solutions that are changing the way the world cleans.



We are where you are

Tennant has the industry's largest direct sales and service organization and a well-supported network of authorized distributors worldwide.



Buying, leasing, renting

We offer flexible options to get you the machines you need, however you need them.



Solutions for your unique needs

Whatever your cleaning needs, Tennant offers a variety of high quality equipment to help you increase your cleaning productivity.



TennantTrue®

Optimize equipment performance and protect your investment with TennantTrue® parts and service.

For a demonstration or additional information, call **1800 226 843** or email contactus@tennantco.com

s30-brochure-en-au 10/23

©2023 The Tennant Company logo and other trademarks designated with the symbol "®" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors. All rights reserved.

Tennant Australia

Unit 2, 10 Johnston Crescent
Horsley Park NSW 2175
T: 1800 226 843 (FREE CALL)
T: +61 2 9839 9700
www.tennantco.com.au
contactus@tennantco.com

Tennant New Zealand

18 Onslow Ave, Papatoetoe,
Auckland, 2104
T: +64 9 253 9013
F: +64 9 253 9015
www.tennantco.co.nz
contactus@tennantco.com