



Debris Tray Deflector Kit

Models: T300, T300e, Speed Scrub 300, A300



This kit includes the necessary parts to contain debris and water pickup inside recovery tank.

INSTALLATION INSTRUCTIONS:

Installation Time: .5 Hours

Tools Required: Philips Screwdriver and an All-Purpose Cleaner (rubbing alcohol).

FOR SAFETY: Before servicing machine, stop on level surface, turn key off, and set parking brake if equipped.


1. Remove and discard the existing water deflector from the recovery tank lid as shown.



2. **IMPORTANT:** Thoroughly clean bottom side of cup holder with rubbing alcohol or an All-Purpose Cleaner.
3. Adhere the round foam seal to bottom of cup holder as shown. Make sure the surface is dry and clean of all soil and grease. Press seal firmly in place.




9014872 Kit Contents

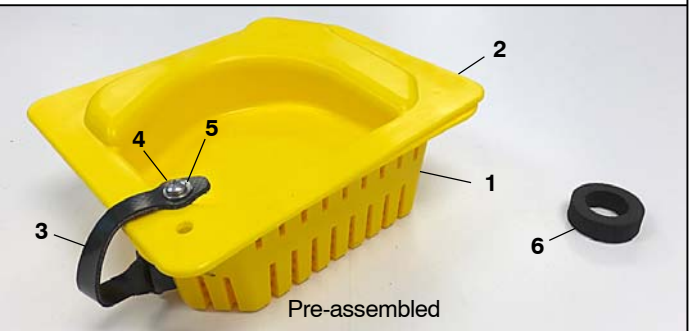

Ref	Part No.	Description	Qty.
1	1207357	Tray, Debris, Tank, Recovery	1
2	1224899	Deflector, Tray, Debris	1
3	1225172	Strap, Retaining, Deflector, 150.0L	1
4	1018155	Screw, Pan, Phl, M5x0.80x16, tcut,ss	1
5	01683	Washer, Flat, 0.38B 0.88d .08, SS	1
6	1225187	Seal, foam, clsd, 12.7, 24.0ID, 40.0OD	1

4. Rest debris tray assembly in recovery tank opening. The foam seal will apply pressure on the debris tray cover when recovery tank lid is closed, preventing debris from escaping tray.

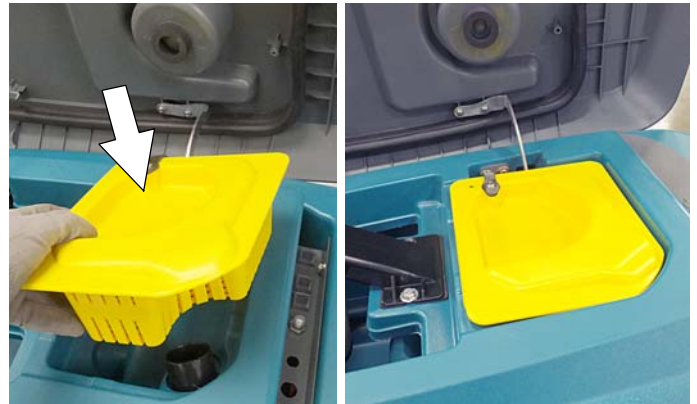

5. Remove, clean and rinse out debris tray after each use.

